


ENCLOSED TRAILER



E-TRACK SYSTEMS & ATTACHMENT


Track Fittings

QL028

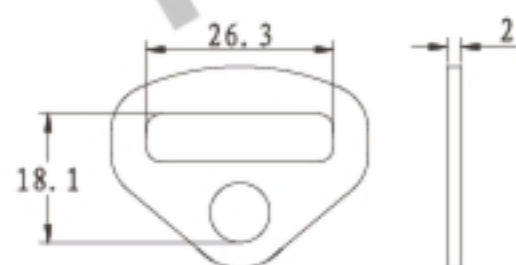



- ▶ Width: 25mm
- B/S: 1000KG
- 1000PCS/CTN, G.W/N.W: 9KG/8KG

QL013

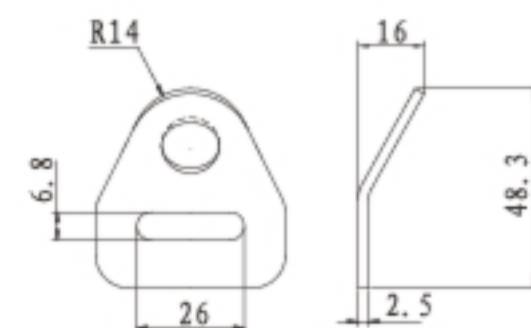


- ▶ Width: 25mm
- B/S: 1100KG
- 500PCS/CTN, G.W/N.W: 16KG/15KG

QL023

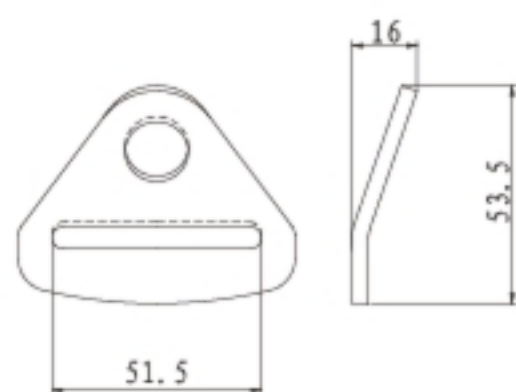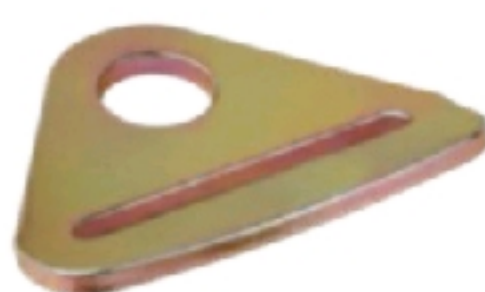


- ▶ Width: 50mm
- B/S: 2200KG
- 300PCS/CTN, G.W/N.W: 20.5KG/19.5KG

QL024

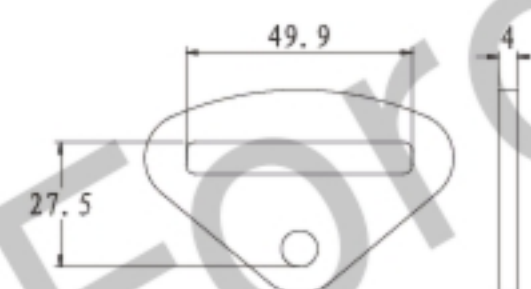


- ▶ Width: 50mm
- B/S: 3000KG
- 300PCS/CTN, G.W/N.W: 16KG/15KG

QL019

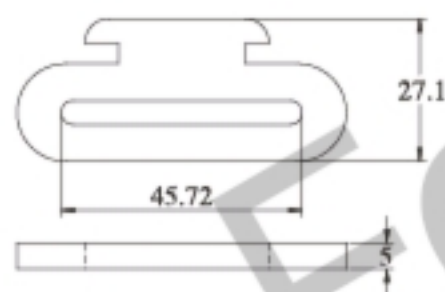


- ▶ Width: 45mm
- B/S: 800KG
- 400PCS/CTN, G.W/N.W: 17KG/16KG

QLF1017

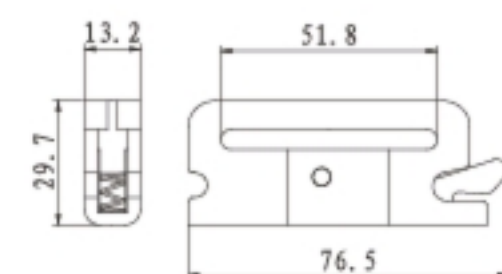


- ▶ Series E/A spring fitting
- B/S: 2000KG
- 300PCS/CTN, G.W/N.W: 29KG/28KG

QL1010

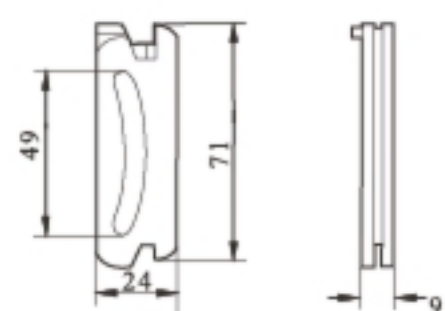



- ▶ Series E/A 3-piece fitting
- B/S: 1350KG
- 300PCS/CTN, G.W/N.W: 16KG/15KG

QL092

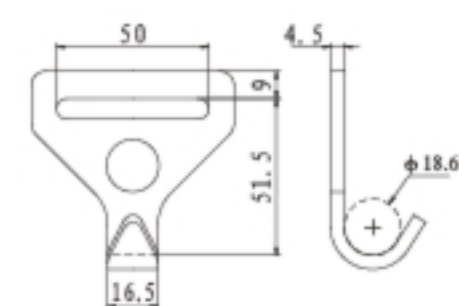


- ▶ Series F track hook
- B/S: 1000KG
- 200PCS/CTN, G.W/N.W: 17KG/16KG

QL018A

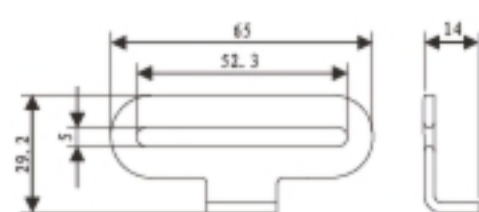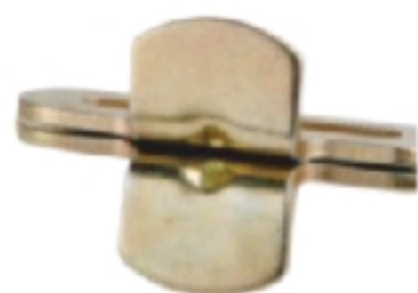

- ▶ Series F butterfly track fitting
- B/S: 900KG
- 800PCS/CTN, G.W/N.W: 25KG/24KG


QL01

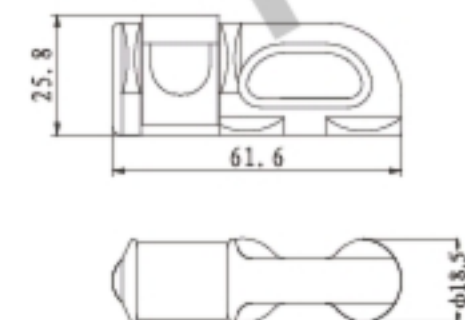

- ▶ Double stud fitting
- B/S: 2700KG
- 250PCS/CTN, G.W/N.W: 23.5KG/22.5KG


Track Fittings

QL02

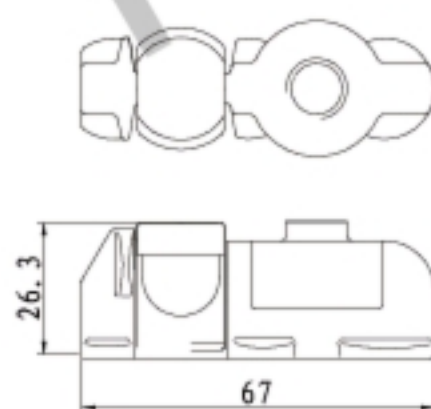


- ▶ B/S: 3000KG
200PCS/CTN, G.W/N.W: 31KG/20KG

QL03

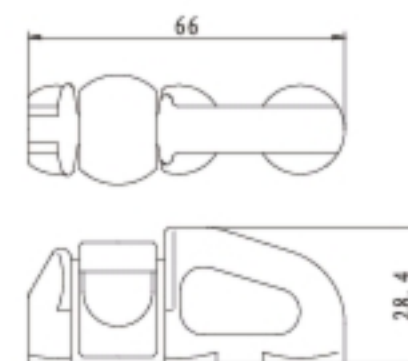


- ▶ Double stud fitting
B/S: 2700KG
220PCS/CTN, G.W/N.W: 28.5KG/27.5KG

QL01-0

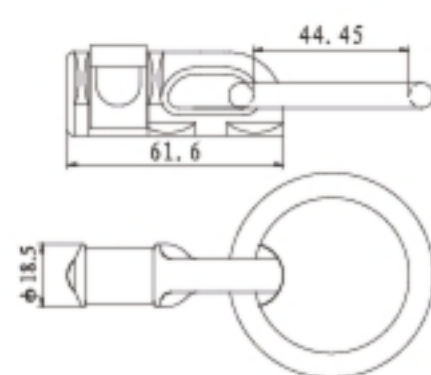


- ▶ Double stud fitting W/O ring
B/S: 2700KG
200PCS/CTN, G.W/N.W: 28KG/27KG

QL01-P

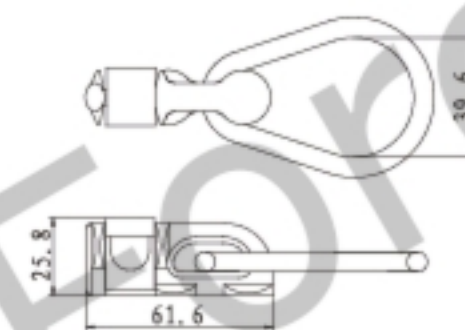


- ▶ Double stud fitting W/pear ring
B/S: 2700KG
200PCS/CTN, G.W/N.W: 24.5KG/23.5KG

QL03-P

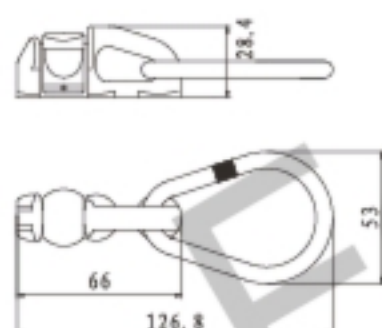


- ▶ Double stud fitting W/pear ring
B/S: 2700KG
150PCS/CTN, G.W/N.W: 26.5KG/25.5KG

QL08

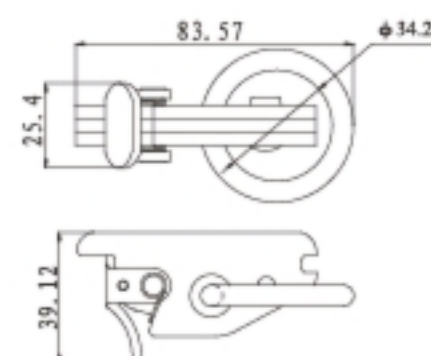


- ▶ Series E/A fitting W/O ring
B/S: 2700KG
100PCS/CTN, G.W/N.W: 20KG/19KG

QL07

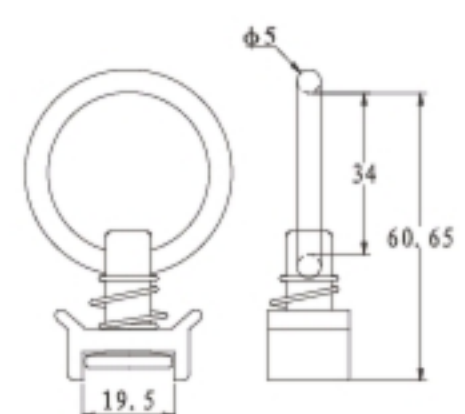


- ▶ Single stud fitting W/O ring
B/S: 1500KG
500PCS/CTN, G.W/N.W: 24.5KG/23.5KG

QL07C

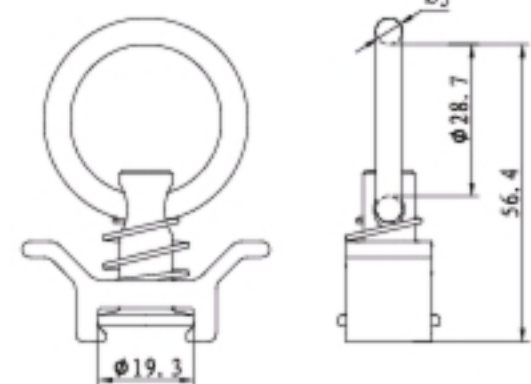


- ▶ Stud Fitting Single,
Aluminum With Round Ring.
200PCS/CTN, G.W/N.W: 10KG/9KG

QL1018B

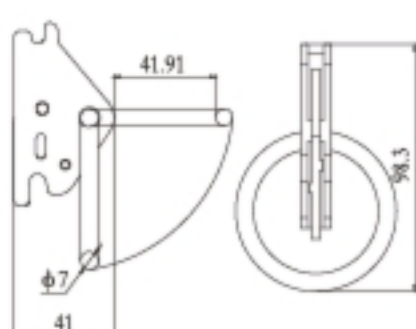


- ▶ Series E/A fitting W/O ring
B/S: 1850KG
100PCS/CTN, G.W/N.W: 15.5KG/15KG


QL1018A

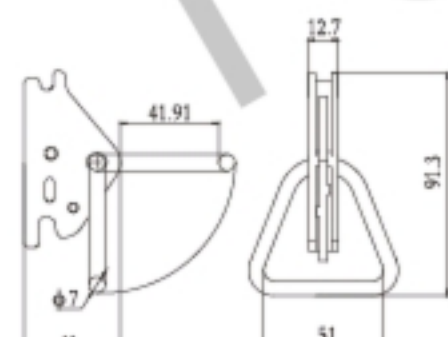

- ▶ Series E/A fitting W/Triangle ring
B/S: 1850KG
100PCS/CTN, G.W/N.W: 15.5KG/15KG


▶ Track Fittings

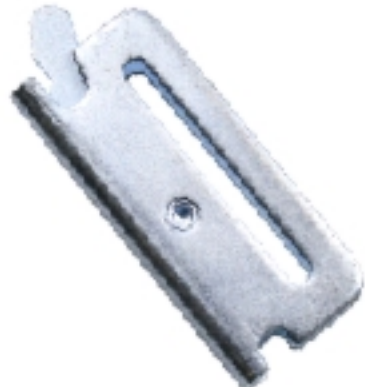QLTF-001  ▶ Tool holder for E track	QLTF-002  ▶ Series E/A fitting W/O ring B/S: 900KG	QLTF-003  ▶ E track J Hook Fitting	QLTF-004  ▶ E track J Hook Fitting
QLTF-005  ▶ E track J Hook Fitting	QLTF-006  ▶ Series E/A spring fitting B/S: 2000KG	QLTF-007  ▶ Series E/A spring fitting B/S: 2200KG	QLTF-008  ▶ Series E/A spring fitting B/S: 2000KG
QLTF-009  ▶ D ring	QLTF-010  ▶ Bolt plate	QLTF-011  ▶ Lashing strap slide buckle	QLTF-012  ▶ Action spring buckle strap
QLTF-013  ▶ E Track spare tire holder mount	QLTF-014  ▶ Wood end socket for E track	QLTF-015  ▶ Single stud fitting W/D ring	QLTF-016  ▶ Single stud fitting W/O ring

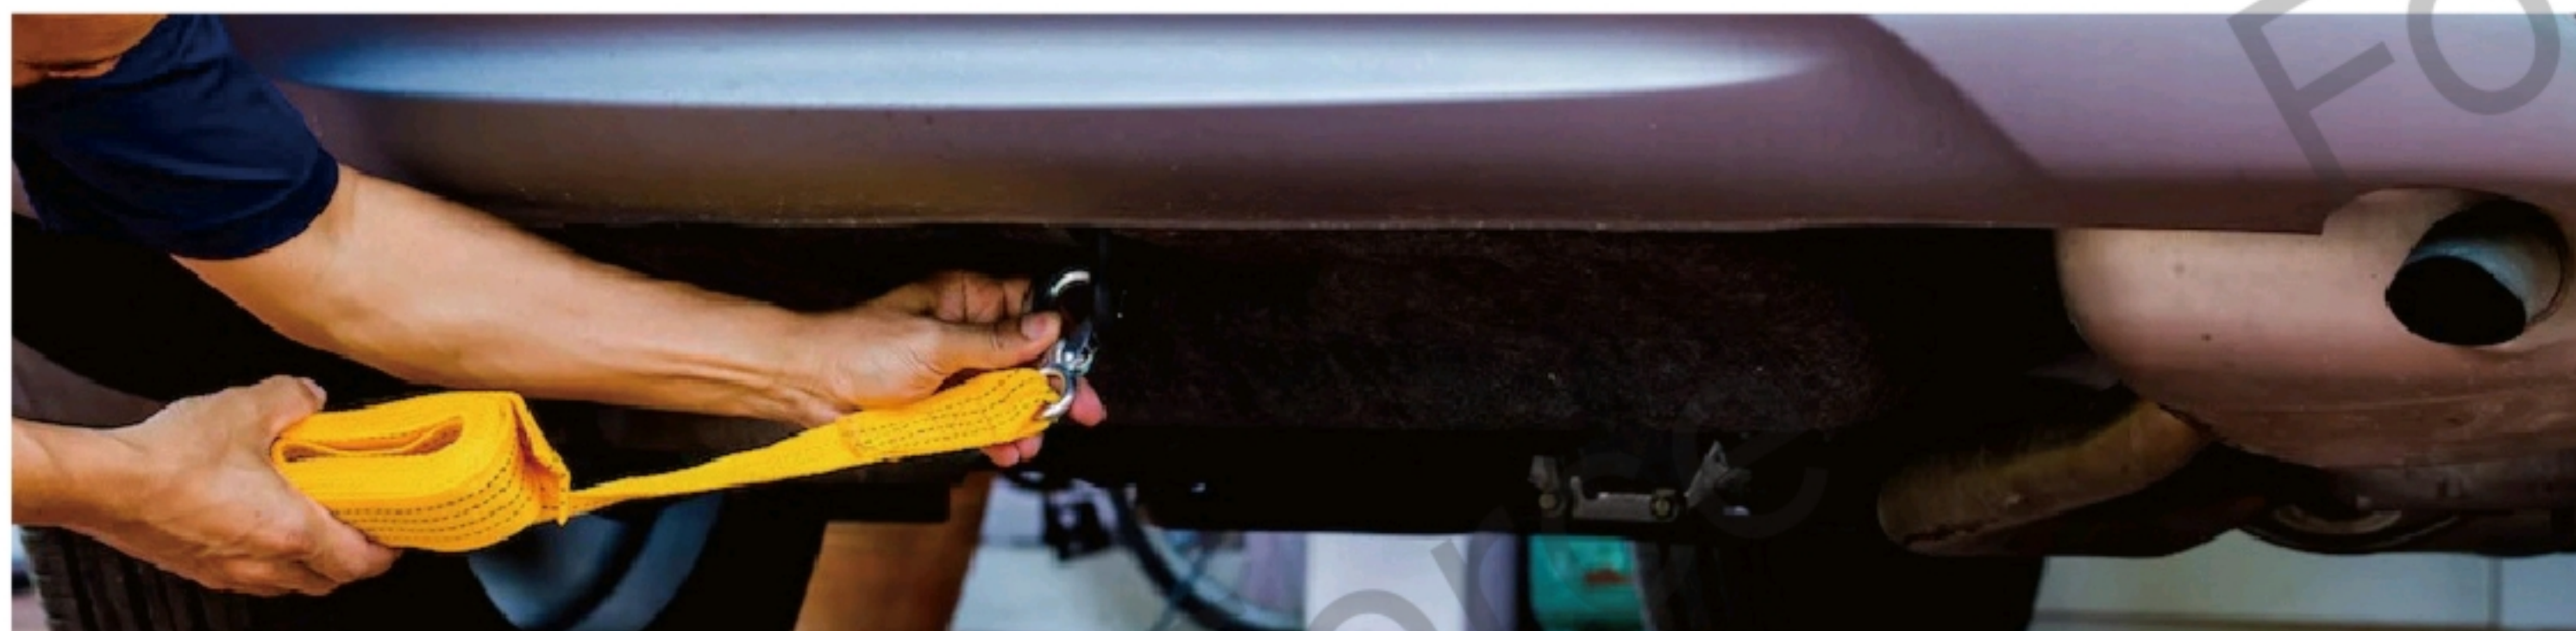


Recessed Pan Fitting

QL08

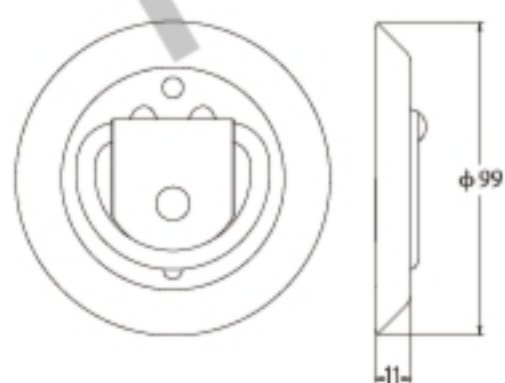


► B/S: 700KG
150PCS/CTN, G.W/N.W: 13.5KG/12.5KG

QL11

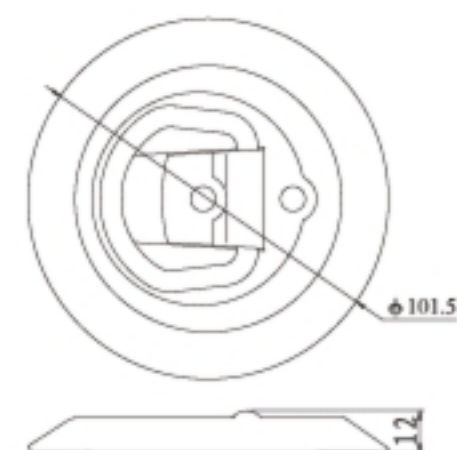

► B/S: 550KG
200PCS/CTN, G.W/N.W: 27KG/26KG

QL10

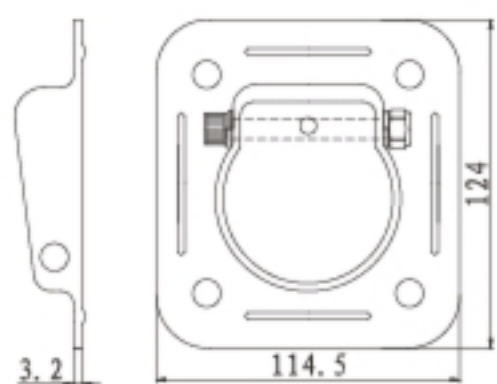


► B/S: 2250KG
40PCS/CTN, G.W/N.W: 21KG/20KG

QL06




► B/S: 2500KG
50PCS/CTN, G.W/N.W: 33.5KG/32.5KG

QL01

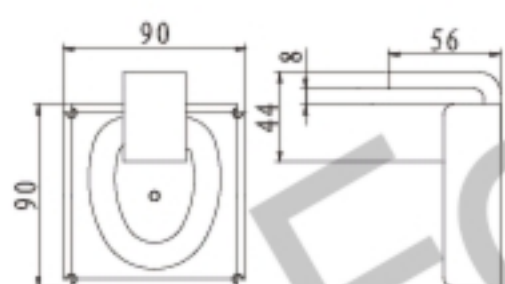


► B/S: 6000KG
30PCS/CTN, G.W/N.W: 25.5KG/24.5KG

QL05

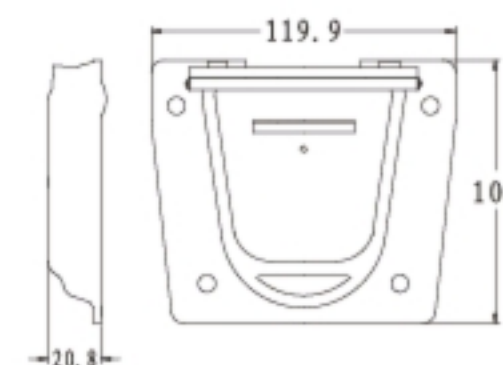


► B/S: 2500KG
50PCS/CTN, G.W/N.W: 29.5KG/28.5KG

QL03

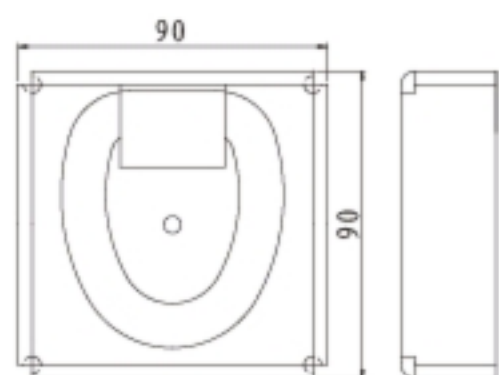


► B/S: 6000KG
30PCS/CTN, G.W/N.W: 23.5KG/22.5KG

QL09

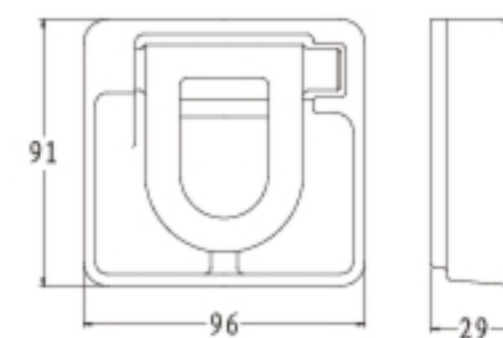


► B/S: 2500KG
30PCS/CTN, G.W/N.W: 28KG/27KG

QL36A

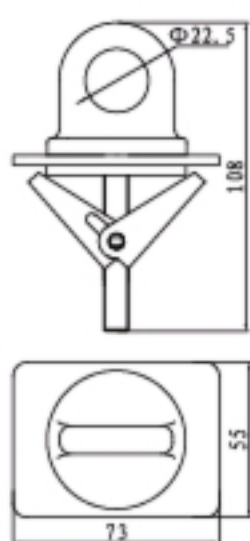

► Chrome Toggle Anchor Point, Bulk
8PCS/CTN, G.W/N.W: 2.0KG/1.5KG

QL07








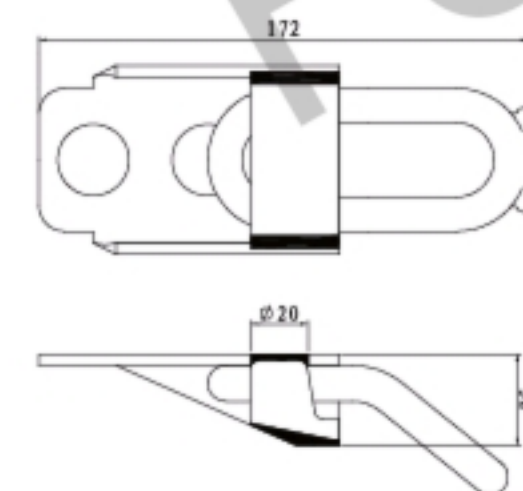


► B/S: 5000KG
50PCS/CTN, G.W/N.W: 31KG/30KG

ETH

The technical drawing illustrates the ETH (Elastisch Trennband) component. On the left is a perspective view of the dark green, ribbed band. On the right is a detailed cross-section with the following dimensions:

- Overall width: 11 mm
- Overall height: 125 mm
- Internal height: 88 mm
- Top flange thickness: 2.5 mm
- Distance between vertical ribs: 14.2 mm
- Width of a vertical rib: 6.5 mm
- Radius of the rib profile: 6.4 mm
- Distance from the left edge to the first rib: 27 mm
- Distance between the last rib and the right edge: 50.8 mm

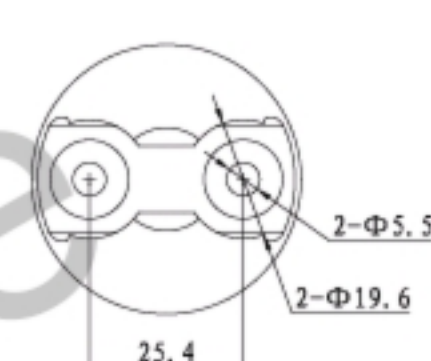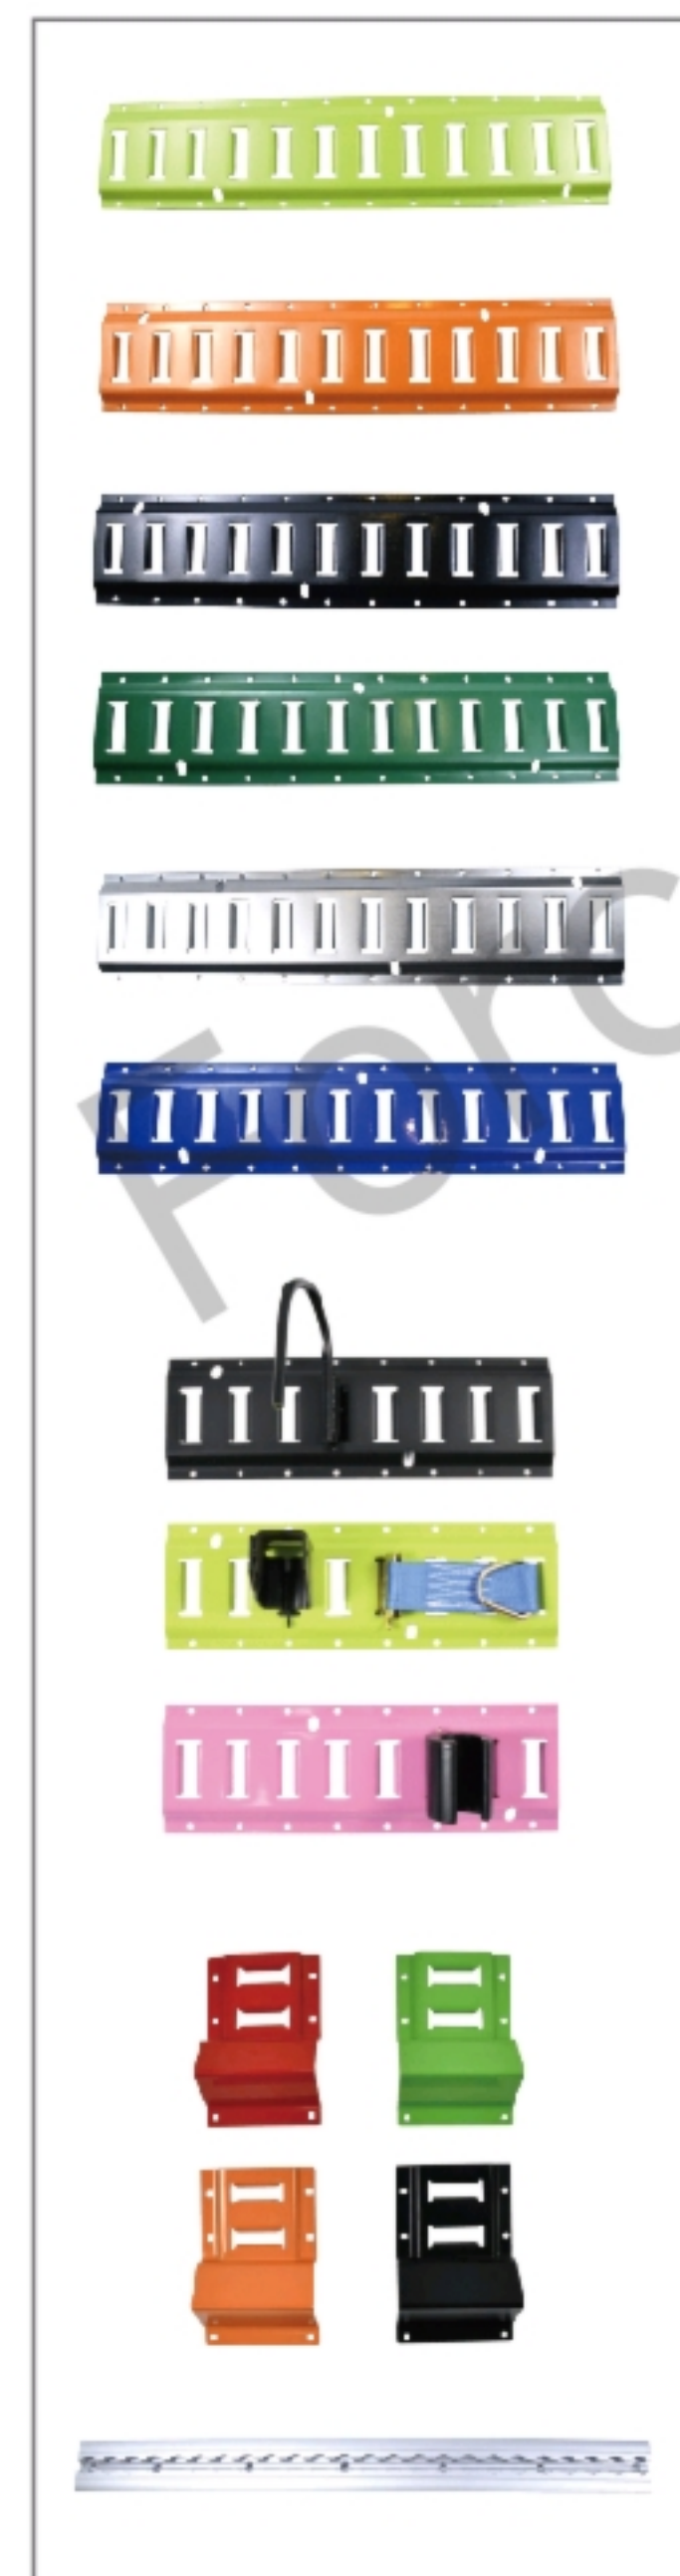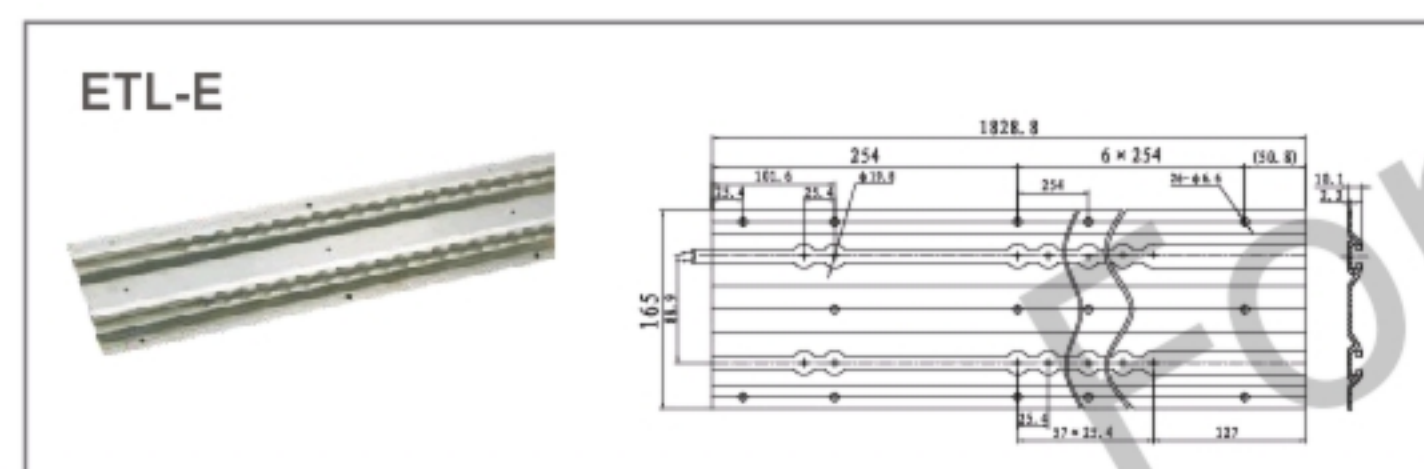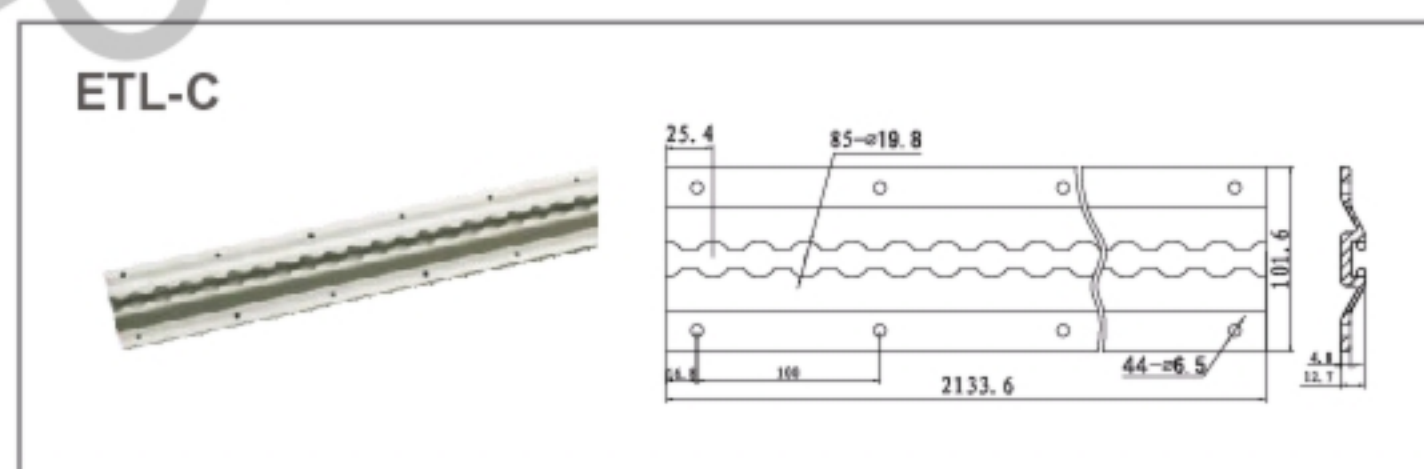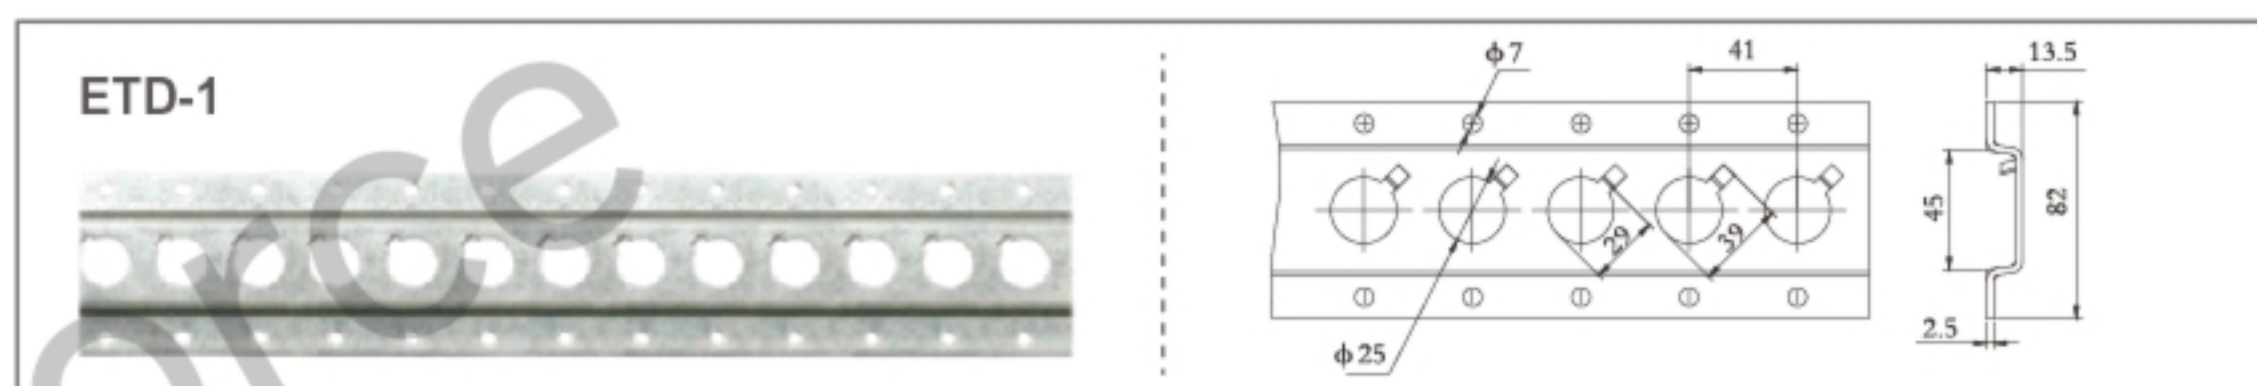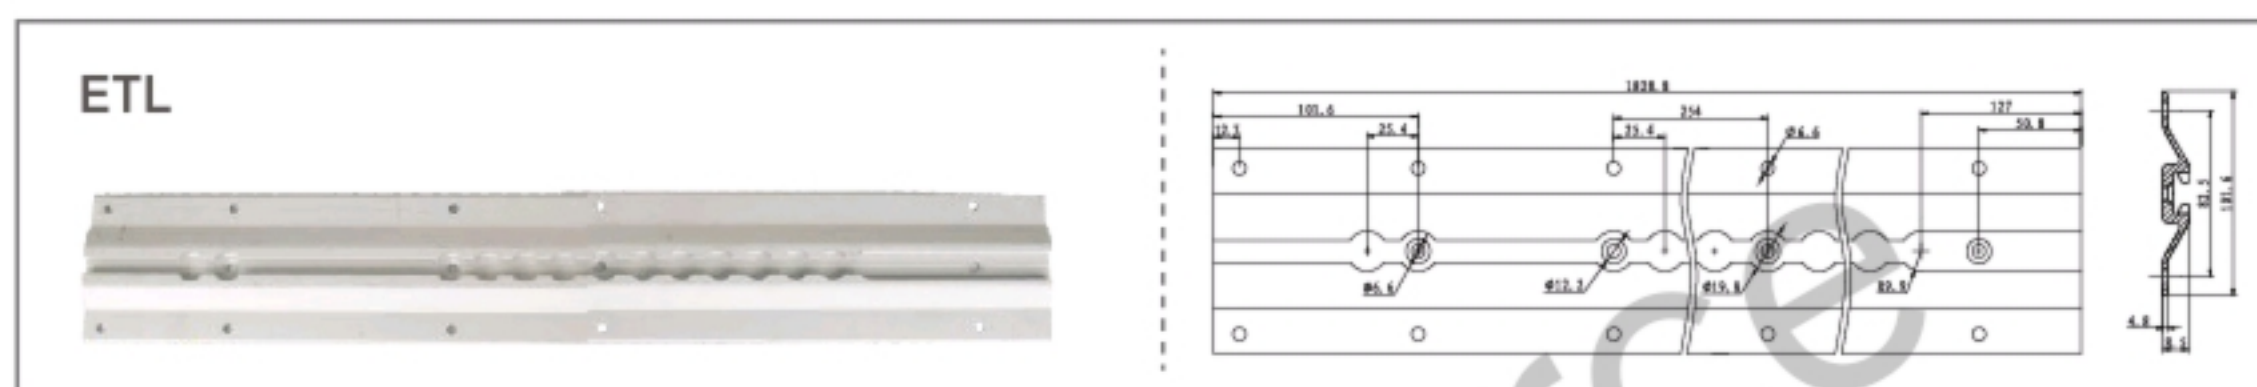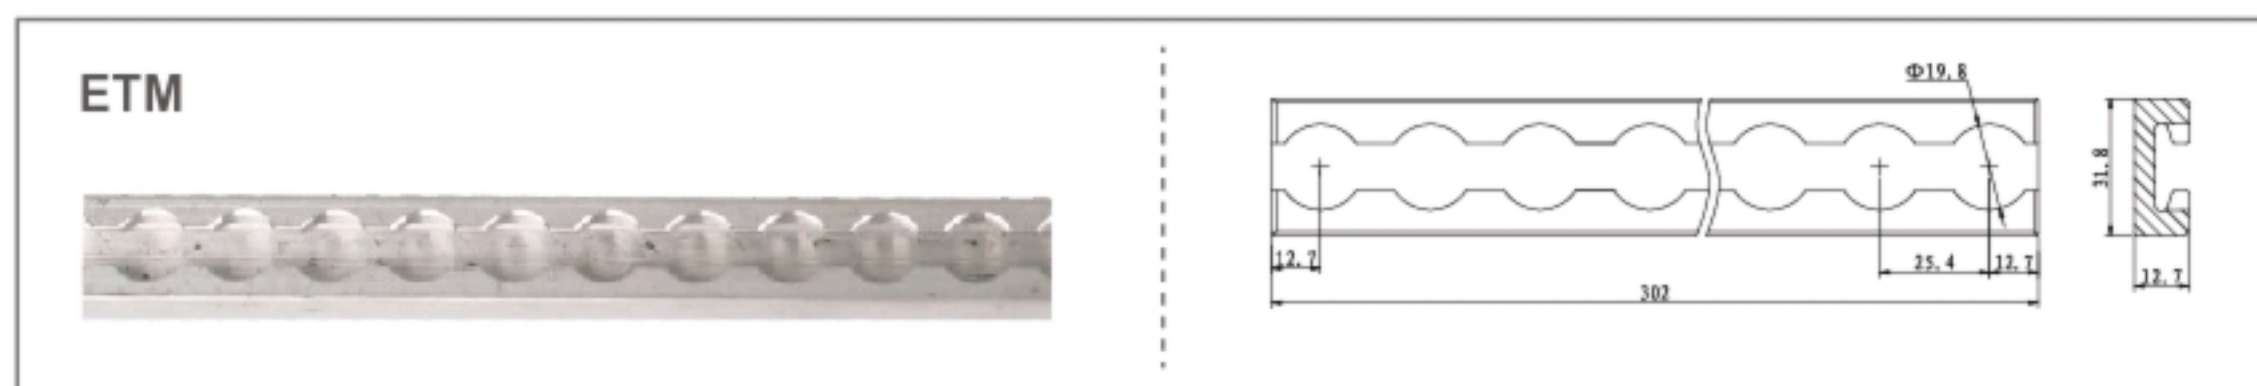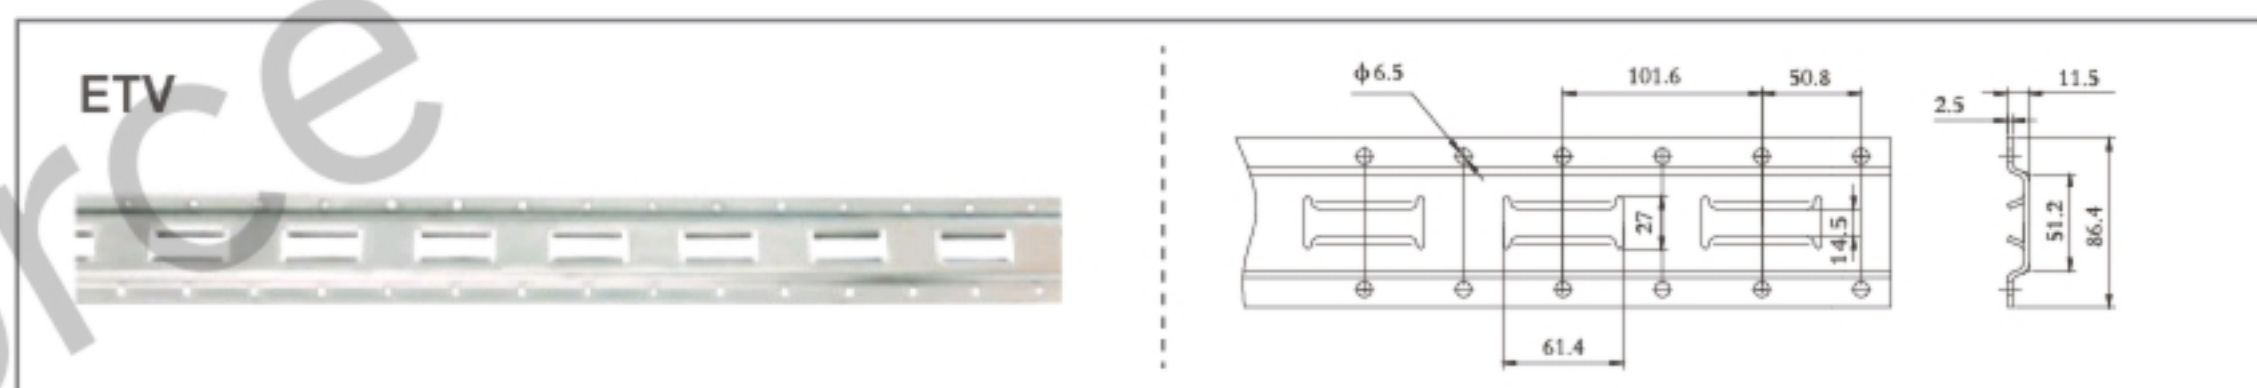

Series E Beams

QLE100T

Steel Tube Series E Beam
Adjustable Range: 91.5" to 102.5"

Decking/Vertical W.L.L.: 1500lbs/680kgs
Shoring/Horizontal W.L.L.: 1500lbs/680kgs
60pcs/pallet, G.W/N.W.: 960kgs/940kgs, 26cuft



QLE100L

Aluminum Tube Series E Beam
Adjustable Range: 85.5" to 96.5"


Decking/Vertical W.L.L.: 2200lbs/1000kgs
Shoring/Horizontal W.L.L.: 2200lbs/1000kgs
10 0pcs/pallet, G.W/N.W.: 830kgs/790kgs, 42cuft



QLE100LH

Heavy Duty Aluminum Tube Series E Beam
Adjustable Range: 83.7" to 94.7"

Decking/Vertical W.L.L.: 3000lbs/1360kgs
Shoring/Horizontal W.L.L.: 2500lbs/1130kgs
100pcs/pallet, G.W/N.W.: 1200kgs/1160kgs, 42cuft



Item No.	Steel Plate Thickness, mm	Length mm	Q'ty pcs/ctn	G.W kgs	N.W kgs	Volume cuft
SYE-1	3	314.5	14	25.5	24.5	0.73
SYE-2	3.5	314.5	14	27	26	0.73
SYE-3	4	314.5	14	29	28	0.73
SYE-7	3	457.2	10	25.5	24.5	0.73

E BEAM END



SYE-G



► Locking Beam End
10pcs/ctn, G.W/N.W.: 27.5kgs/26.5kgs, 0.7cuft

SYE-PIN



► Attaching Pin
500pcs/ctn, G.W/N.W.: 30kgs/29kgs, 0.3cuft

SYE-CL



► Insert Tube
10pcs/ctn, G.W/N.W.: 16kg/15kg

► **Series F Bars**

QLF100

Steel Round Series F Bar
Adjustable Range:96" to 111"
W.L.L:500lbs/227kgs,Tube Diameter:1.66"
100pes/pallet, G.W/N.W:940kgs/920kgs, 14.5cuft



QLF101

Steel Square Series F Bar
Adjustable Range:96" to 111"
W.L.L:1000lbs/454kgs,Tube Diameter:2"
80pes/pallet, G.W/N.W:1020kgs/1000kgs, 17.5cuft



QLF200D

F Track Shoring Bar W/handles 24mm Ends 2172mm-2631mm
100pcs/pallet, G.W/N.W:685kg/675kg



► **Wood Beam Socket**

Item No.	B/S lbs	A (mm)	B (mm)	C (mm)	D (mm)	Q'ty pcs/ctn	G.W kgs	N.W kgs
SYS-1	1400	110	84.4	48.9	12	40	19	18
SYS-2	1400	110	84.4	48.9	12	40	18.5	17.5
SYS-3	1400	110	84.4	96.5	12	40	24	23

